

technical details IC200 series



	weight	working length	Netz	Fuse
IC200-1300	29Kg	1280mm	210V-230V 50/60Hz 660W	Fuse 5x20 3,14AT
IC200-2200	54Kg	2180mm	210V-230V 50/60Hz 1720W	Fuse 5x20 8AT



Europa	
UL-Version USA 110V 50/60 Hz	
SASO middle east	 220 V 13 A

	IC200-1300	IC200-2200
Detachable end stop from 12 to 300 mm	x	x
Side lay	x	x
Digital Power display 0..100%	x	x
Temperature is infinitely adjustable	x	x
Heating wire is adjustable from - 8 to 20 mm	x	x
User manual	x	x

material	bending-temperature	Max thickness
ABS	100°C to 150°C	12mm
PC	150°C to 210°C	12mm
PMMA (Acryl)	120°C to 170°C	15mm
PS	100°C to 150°C	15mm
PVC-hard	110°C to 140°C	15mm
PET	120°C to 160°C	15mm

Packing 12mm Karton or OSB woodbox				
IC200-1300	Ca. 60kg	1520mm	659mm	310mm
IC200-2200	Ca. 80Kg	2424mm	659mm	310mm

IC200-1300

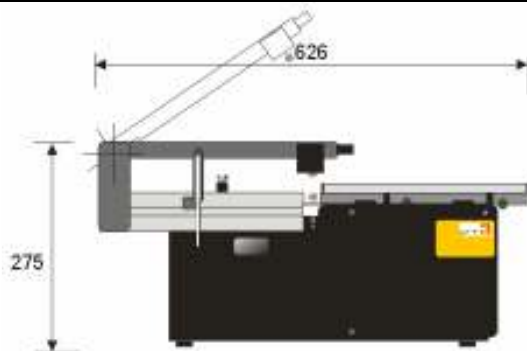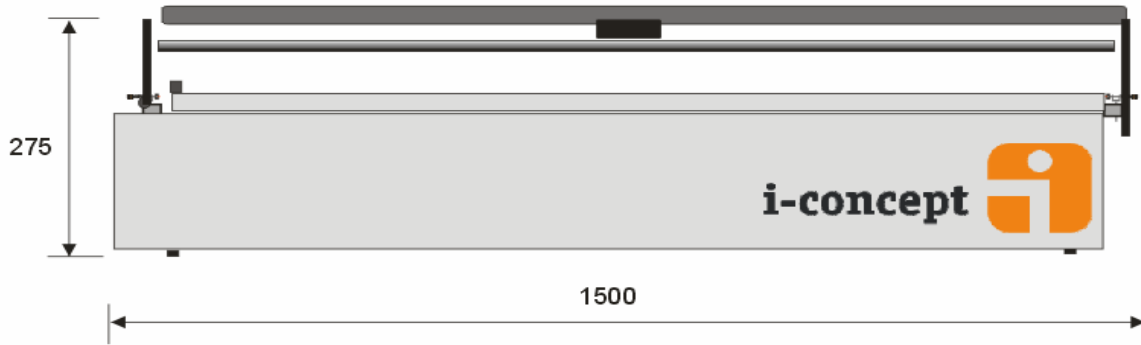

IC200-2200

